


## Underfloor hydrant telescopic

## N492

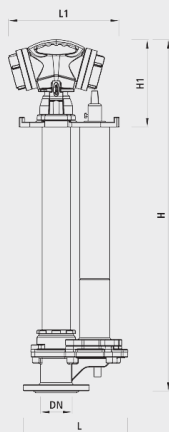

### Design

- 2 storz couplings 75
- Key nut 20 mm
- integrated extendable upright pipe
- Permanently mounted flange seal

### Characteristics

- Hydrant head extendable and rotatable through 360°
- 15 rotations open/close with fixed stops in the open/close position
- Automatic drainage, frost-resisting
- Flanged connection DN 80

### Material

- Protection against corrosion through epoxy powder coating and use of stainless materials
- Seals: EPDM with DVGW W270 approval

|            | DN | H (cm) | Frost depth (cm) | Pull out (cm) | L1 (cm) | H1 (cm) | weight (kg) |
|------------|----|--------|------------------|---------------|---------|---------|-------------|
| N492000081 | 80 | 81     | 57               | 42.5          | 32      | 26      | 40.000      |
| N492000106 | 80 | 106    | 97               | 67.5          | 32      | 26      | 47.000      |
| N492000131 | 80 | 131    | 135              | 67.5          | 32      | 26      | 48.000      |