


Slide clamp ROBUSTO DN 50, PE d 63 mm, at the top, across, PN 16

2730

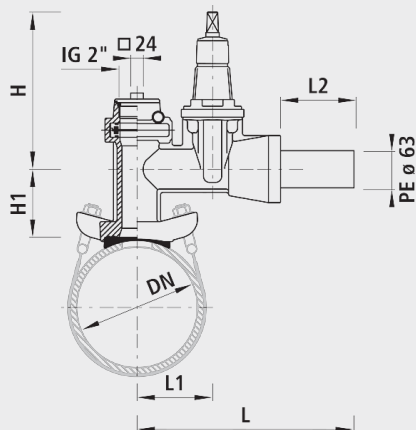

Application

- For tapping under pressure, with integrated plug sheet
- Assembly with two retaining brackets
- For cast, FZM, steel and Eternit pipes, DN 100 to DN 500

Outlet

- Line outlet is crosswise to the pipeline
- PE weld-on end SDR 11, d 63
- PE weld-on end, factory fitted
- Diameter d 63 suitable for Hawle plug-in fittings
- Schraubmuffen DN 50

Characteristics

- E3 Slider technology
- Slider size DN 50
- Betriebstemperatur - max. 40°C
- Pressure PN 16

Material

- Gehäuse
 - Späroguss EN-GJS-400 (GGG 40)
 - EWS-Beschichtung nach GSK, RAL-GZ 662, Schichtdicke min. 250 µm

	DN	PN (bar)	L (mm)	L1 (mm)	L2 (mm)	Drill-ø max. (mm)	H1 (mm)	H (mm)	weight (kg)		NPK No. 411	NPK No. 412
2730050063	100-500	16	370	125	125	46	115	234	15.000	1	862764	842124

1 = Dichtung 3170 verwenden