


## Adapter steel/PE with pull-over sleeve, PN 5

3104

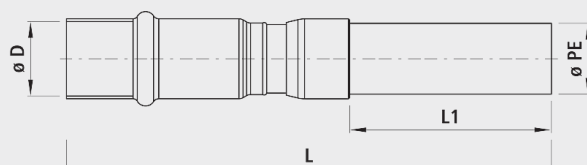

### Characteristics

- High quality steel-PE pipe transition for gas piping
- Protection against corrosion through PE casing
- Multiple PE-HD welding possible
- Fully encapsulated steel/PE connection
- Welding with a fillet weld after installation
- SVGW and DVGW certified
- Druckstufe PN 5

### Material

- Stahl nach Norm DIN EN 10305 / 1, DIN EN 10305 / 2, DIN EN 10216 / 2, DIN EN 10216-1, DIN EN 10217-1 und DIN EN 10305-4 oder gleichwertig.
- Die Rollringe sind aus Moosgummi (EPDM) DIN 4060 gefertigt.
- Einschweisstützen
  - Standard: PE 100, SDR 11
  - Auf Anfrage: auf SDR 17 ausgedreht

### Caution

- PE-pipe 100, SDR 11 standard
- The PE pipe can be turned to SDR 17 on request.
- Other sizes of the PE or steel connections are possible on request.
- The sealing ring must be destroyed with heat after the welding to check the seal.

|            | DN  | ø PE | ø D   | L (mm) | L1 (mm) | weight (kg) |
|------------|-----|------|-------|--------|---------|-------------|
| 3104025032 | 25  | 32   | 33.7  | 485    | 300     | 1.500       |
| 3104032040 | 32  | 40   | 42.4  | 490    | 300     | 1.700       |
| 3104040050 | 40  | 50   | 48.3  | 500    | 300     | 2.200       |
| 3104050063 | 50  | 63   | 60.3  | 520    | 300     | 2.500       |
| 3104080090 | 80  | 90   | 88.9  | 610    | 255     | 6.500       |
| 3104100110 | 100 | 110  | 114.3 | 610    | 250     | 8.100       |
| 3104100125 | 100 | 125  | 114.3 | 625    | 255     | 9.700       |
| 3104150160 | 150 | 160  | 168.3 | 645    | 240     | 17.200      |
| 3104150180 | 150 | 180  | 168.3 | 670    | 240     | 16.500      |
| 3104200225 | 200 | 225  | 219.1 | 790    | 300     | 30.500      |