


AUMA actuator electric, 24 VCC

4992

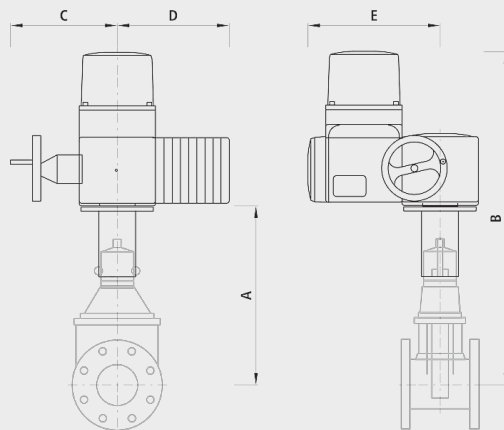

Application

- The AUMA actuator can be mounted onto all Hawle E2/3 sliders from DN 50.
- Possible to retrofit
- Delivery incl. adapter (lantern)

Characteristics

- Protection class IP 68 (motor protection) IP 65 (standard)
- Rotary drive type SA for control operation OPEN/CLOSED 24 VDC, 1-phase DC current
- With 2 torque and 2 limit switches
- Optical position indicator
- Handwheel for manual override
- Heating integrated in the motor from 5 to 20 W,max. 0.8 Amp.
- Closing times in seconds per stroke according to the table (t/s)

Caution

- Spezielles Oberteil mit beschichteter Spindel für Motorenantriebe im regelmässigen Gebrauch ab DN 150 erhältlich

	DN	PN (bar)	Type	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	T/S	weight (kg)
4992V00051	50	10/16/25	SA07.6	319	610	249	443	238	37	34.000
4992V00066	65	10/16/25	SA07.6	382	673	249	443	238	48	34.000
4992V00081	80	10/16/25	SA07.6	389	680	249	443	238	60	34.000
4992V00101	100	10/16/25	SA07.6	426	717	249	443	238	75	34.000
4992V00126	125	10/16/25	SA10.2	498	791	254	528	248	93	40.000
4992V00151	150	10/16/25	SA10.2	510	803	254	528	248	112	40.000
4992V00201	200	10/16/25	SA10.2	617	910	254	528	248	127	40.000
4992V00251	250	10/16/25	SA14.2	821	1009	338	520	286	157	76.000
4992V00301	300	10/16/25	SA14.2	928	1093	338	520	286	136	76.000
4992V00351	350	10/16/25	SA14.2	1038	1178	338	520	286	160	76.000
4992V00401	400	10/16/25	SA14.2	1147	1336	338	520	286	155	78.000