
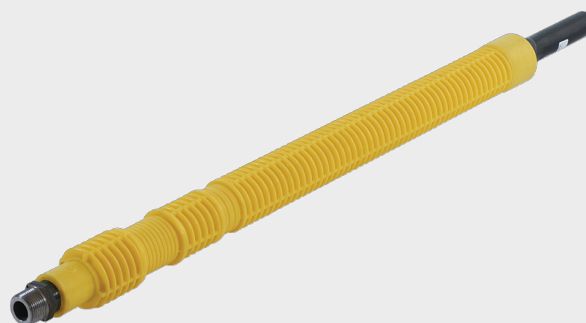


Wall duct PE-AG, with male thread, straight, PN 5

6855

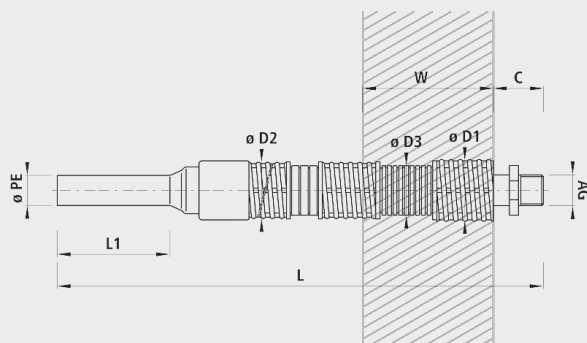

Characteristics

- Compatible with multi-range inlets
- SGVW certified

Material

- Fully encapsulated steel/PE connection
- Connection of male thread: Steel
- Weld-in end: PE 100, SDR 11
- Protective casing: PE with fixed-point fixation

Installation and assembly

- For direct installation in the wall, with or without grouting device
- Dry installation in core drill hole
- Compatible with multi-range inlets
- The pull-out protection can be mounted directly.

Caution

- Observe the installation instructions

	ø PE	AG	L (mm)	L1 (mm)	ø D1 (mm)	ø D2 (mm)	ø D3	C cm	ø KB T (mm)	ø KB N (mm)	W T	W N (mm)	weight (kg)
6855032070	32	1"	700	120	66	60	53	10-14	100	90	370	300	2.100
6855040070	40	1¼"	740	120	80	75	75	11-15	130	120	370	300	3.300
6855050070	50	1½"	740	130	80	75	75	11-15	130	120	370	300	3.300
6855063070	63	2"	740	130	95	90	90	12-16	130	120	370	300	5.400
6855032110	32	1"	1000	120	66	60	53	10-14	100	90	670	600	3.500
6855040110	40	1¼"	1040	120	80	75	75	11-15	130	120	670	600	5.000
6855050110	50	1½"	1040	130	80	75	75	11-15	130	120	670	600	5.000
6855063110	63	2"	1040	130	95	90	90	12-16	130	120	670	600	8.600