
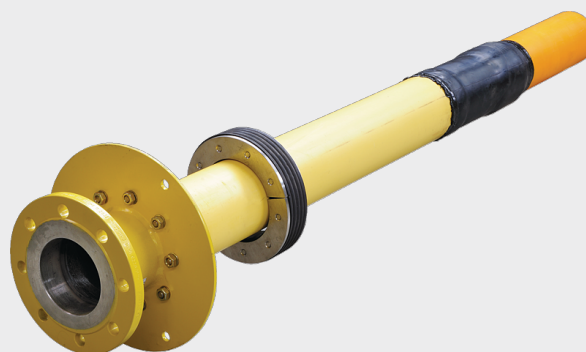


## Wall duct flange/PE, dry installation, straight, PN 5

6858

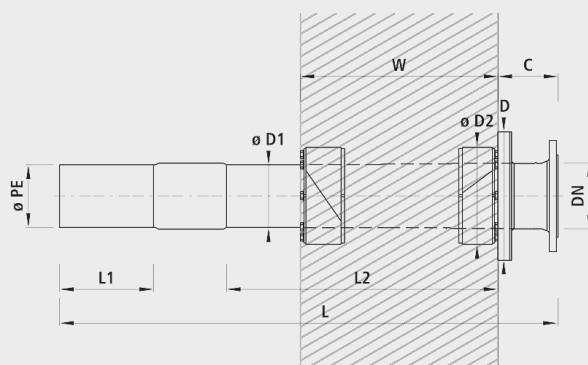

### Characteristics

- Flange connection
- Fixed point fixing available
- Flange: Drill PN 16

### Material

- Fully encapsulated steel/PE connection
- Weld-in end: PE 100, SDR 11

### Installation and assembly

- Dry installation in core drill hole with compression sealing rings

### Caution

- Observe the installation instructions

|            | ø PE | DN  | L<br>(mm) | L1<br>(mm) | L2<br>(mm) | D<br>(mm) | ø D1<br>(mm) | ø D2<br>(mm) | C cm | ø KB T<br>(mm) | W   | weight<br>(kg) |
|------------|------|-----|-----------|------------|------------|-----------|--------------|--------------|------|----------------|-----|----------------|
| 6858090080 | 90   | 80  | 1420      | 255        | 800        | 300 ø     | 88.9         | 150          | 10.5 | 150            | 800 | 28.000         |
| 6858110100 | 110  | 100 | 1430      | 255        | 800        | 300 ø     | 114.3        | 200          | 11.5 | 200            | 800 | 30.000         |
| 6858160150 | 160  | 150 | 1460      | 255        | 800        | 330 □     | 168.3        | 250          | 13.5 | 250            | 800 | 59.000         |
| 6858225200 | 225  | 200 | 1600      | 300        | 800        | 330 □     | 219.1        | 300          | 14.0 | 300            | 800 | 94.000         |