


Wall duct highly flexible, PE, with male thread, PN 5

6859

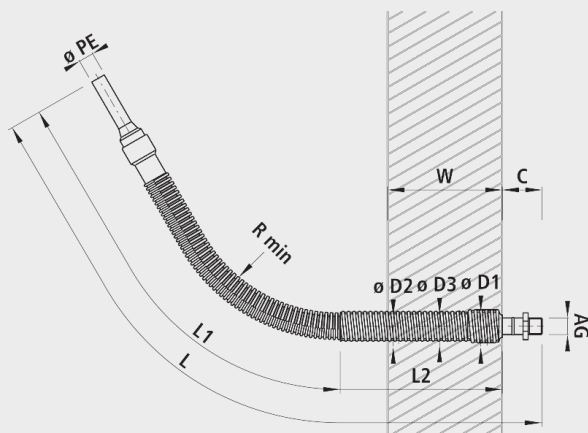

Characteristics

- Corrugated hose construction makes a very small bending radius possible
- Compatible with multi-range inlets
- Other lengths on request
- SGVW certified

Material

- Fully encapsulated steel/PE connection
- Weld-in end: PE 100, SDR 11
- Male thread: Brass
- Protective casing: PE with fixed-point fixation
- Gas-conducting stainless steel corrugated hose

Installation and assembly

- For direct installation in the wall, with or without grouting device
- Dry installation in core drill hole
- The pull-out protection can be mounted directly.
- Other lengths on request

	ø PE	AG	PN (bar)	L (mm)	L1 (mm)	L2 (mm)	R min.	ø D1 (mm)	ø D2 (mm)	ø D3	C cm	ø KB T (mm)	ø KB N (mm)	W T	W N (mm)	weight (kg)
6859032200	32	1"	5	2865	2370	420	350	66	60	53	10-14	100	90	380	300	7.000
6859040200	40	1¼"	5	2920	2420	420	350	80	75	75	10-14	130	120	370	300	10.000
6859050200	50	1½"	5	2920	2420	420	350	80	75	75	10-14	130	120	370	300	10.000
6859063200	63	2"	5	2960	2460	420	350	95	90	90	10-14	130	120	370	300	13.000