


Wall duct highly flexible, ball valve and Firesafe handle, PN 5

6864

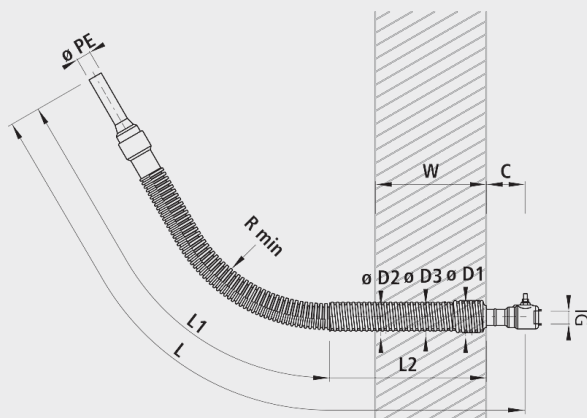

Characteristics

- Ball valve can be thermally loaded up to 650°C
- Firesafe handles fitted
- Weld-in end: PE 100, SDR 11
- Connection with female thread
- Compatible with multi-range inlets
- SGVW certified

Material

- Fully encapsulated steel/PE connection
- Gas-conducting stainless steel corrugated hose
- Weld-in end: PE 100, SDR 11
- Protective casing: PE with fixed-point fixation

Installation and assembly

- For direct installation in the wall, with or without grouting device
- Dry installation in core drill hole
- The pull-out protection can be mounted directly.

Caution

- Observe the installation instructions
- Also available with other connection options (controller screw fitting, flange and backing flange)
- On request available without Firesafe handle

	ø PE	IG	L (mm)	L1 (mm)	L2 (mm)	R min.	ø D1 (mm)	ø D2 (mm)	ø D3	C cm	ø KB T (mm)	ø KB N (mm)	W T	W N (mm)	weight (kg)
6864032000	32	1"	2990	2370	420	350	66	60	53	20-24	100	90	400	300	7.300
6864040000	40	1¼"	3040	2420	420	350	80	75	75	20-24	130	120	400	300	11.000
6864050000	50	1½"	3040	2420	420	350	80	75	75	20-24	130	120	400	300	11.200
6864063000	63	2"	3080	2460	420	350	95	90	90	20-24	130	120	400	300	15.000