
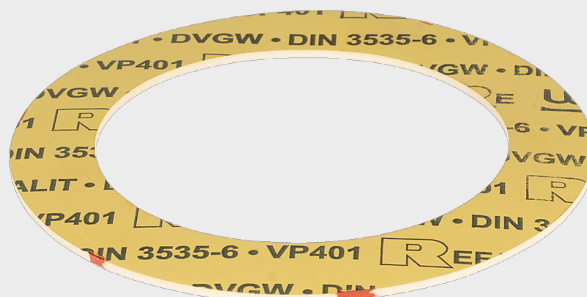


Flange seal REFALIT, PN 16, Gas/Water

8202

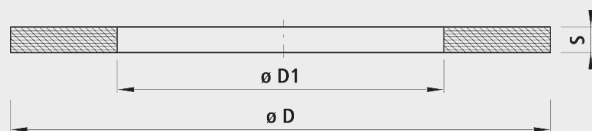

Characteristics

- universally applicable for gas and water
- The non-stick coating does not require additional treatment.
- Temperature resistant to 650°C
- very elastic, break insensitive
- Other nominal widths and pressure levels on request.

Material

- elastomer-bonded fibre seal

	DN	PN (bar)	$\varnothing D$ (mm)	$\varnothing D1$ (mm)	S	weight (kg)
8202025000	25	10-40	71	34	2	0.008
8202032000	32	10-40	82	43	2	0.018
8202040000	40	10-40	92	49	2	0.020
8202050000	50	10-40	107	61	2	0.028
8202065000	65	10-40	127	77	2	0.050
8202080000	80	10-40	142	89	2	0.026
8202100000	100	10-16	162	115	2	0.068
8202125000	125	10-16	192	141	2	0.100
8202150000	150	10-16	218	169	2	0.041
8202200000	200	10-16	273	220	2	0.060
8202250016	250	10-16	329	273	2	0.225
8202300000	300	10	378	324	2	0.255
8202300016	300	16	384	324	2	0.260