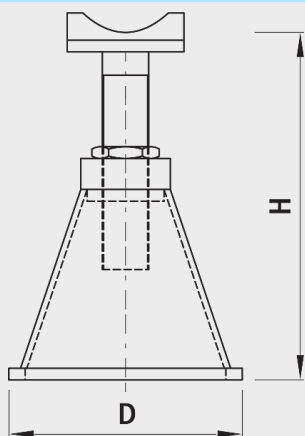


Pipe support, height 225 till 345 mm**9120****Application**

- Higher pipe supports made from INOX are available on request.

Characteristics

- Easy to assemble
- Stable
- Non-corrosive
- The height can be adjusted and it can be used universally
- Special heights on request

Material

- Supports: Aluminium
- Load receptor: INOX with plastic base

	DN	H (mm)	D (mm)	Maximum bearing load	weight (kg)	NPK No. 411
9120000080	80	225-345	230	Fmax = 30 kN 1"/SW 46	3.000	876118
9120000100	100	225-345	230	Fmax = 30 kN 1"/SW 46	3.000	876119
9120000125	125	225-345	230	Fmax = 30 kN 1"/SW 46	3.000	876121
9120000150	150	225-345	230	Fmax = 60 kN 2"/SW 75	3.000	876122
9120000200	200	225-345	230	Fmax = 60 kN 2"/SW 75	3.000	876123
9120000250	250	225-345	230	Fmax = 60 kN 2"/SW 75	3.000	876124
9120000300	300	225-345	230	Fmax = 60 kN 2"/SW 75	3.000	876125
9120000350	350	225-345	230	Fmax = 60 kN 2"/SW 75	3.000	876126
9120000400	400	225-345	230	Fmax = 60 kN 2"/SW 75	3.000	876127
9120000500	500	225-345	230	Fmax = 60 kN 2"/SW 75	3.000	
9120000600	600	225-345	230	Fmax = 60 kN 2"/SW 75	3.000	

SW = Schlüsselweite