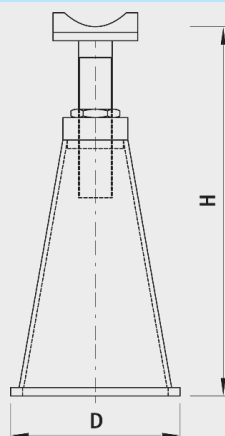


Pipe support, height 450 till 600 mm**9122****Application**

- Higher pipe supports made from INOX are available on request.

Characteristics

- Easy to assemble
- Stable
- Non-corrosive
- The height can be adjusted and it can be used universally
- Special heights on request

Material

- Supports: Aluminium
- Load receptor: INOX with plastic base

	DN	H (mm)	D (mm)	Maximum bearing load	weight (kg)	NPK No. 411
9122000080	80	450-600	300	Fmax = 30 kN 1"/SW 46	6.700	876158
9122000100	100	450-600	300	Fmax = 30 kN 1"/SW 46	6.700	876159
9122000125	125	450-600	300	Fmax = 30 kN 1"/SW 46	6.700	876161
9122000150	150	450-600	300	Fmax = 60 kN 2"/SW 75	6.700	876162
9122000200	200	450-600	300	Fmax = 60 kN 2"/SW 75	6.700	876163
9122000250	250	450-600	300	Fmax = 60 kN 2"/SW 75	6.700	876164
9122000300	300	450-600	300	Fmax = 60 kN 2"/SW 75	6.700	876165
9122000350	350	450-600	300	Fmax = 60 kN 2"/SW 75	6.700	876166
9122000400	400	450-600	300	Fmax = 60 kN 2"/SW 75	6.700	876167
9122000500	500	450-600	300	Fmax = 60 kN 2"/SW 75	6.700	
9122000600	600	450-600	300	Fmax = 60 kN 2"/SW 75	6.700	

SW = Schlüsselweite