


Extension kit for installation kit rigid 9630

9631

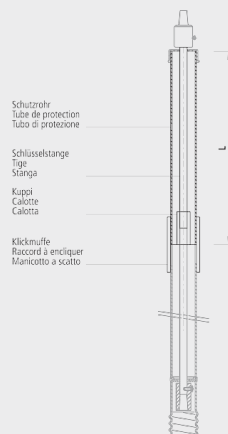

Application

- For the extension of a rigid installation kit (EBG) that is already installed in a main slider range of DN 50 to DN 500

Installation and assembly

1. Remove the key nut and sealing cap from the EBG to be extended.
2. Fit the click-on socket and coupling onto the EBG to be extended up to the stop.
3. Shorten the PE pipe and the square shaped steel to the required length and fit into the click-on socket or coupling up to the stop.
4. Remount the sealing cap and key nut on the extended EBG.

Material

- Einbaugarnituren
 - Schutzrohr aus PE
 - Schlüsselnuss Sphäroguss EN-GJS-400 (GGG 40), verzinkt
 - Kuppelmuffe Sphäroguss EN-GJS-400 (GGG 40), verzinkt
 - Schlüsselstangen Stahl verzinkt

		DN	ø D	L (mm)	weight (kg)	NPK No. 412
9631000050		50 - 200	75	500	2.300	871821
9631000100		50 - 200	75	1000	3.800	
9631000150		50 - 200	75	1500	5.300	
9631100050		250 - 500	75	500	4.400	
9631100100		250 - 500	75	1000	7.200	
9631100150		250 - 500	75	1500	10.000	
9631000051	x	50-200	63	500	2.000	871821
9631000101	x	50-200	63	1000	3.500	871821
9631000151	x	50-200	63	1500	5.000	871821

x = Type 2016