


Inlet bend BAIO® can be shortened for height adjustment

N840

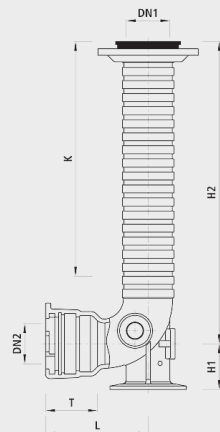

Design

- Cast inlet elbow, flange/BAIO® socket
- Can be shortened to suit the height
- Delivery incl. bolts, nuts, washers and insulating sleeves

Material

- Inlet bend and dual-chamber flange: GGG 40
- Coating: Epoxy coating acc. to RAL GSK
- Cuff: NR
- Clamping ring: Delrin (POM)
- Screws: INOX A2

Installation and assembly

- Shorten spigot end on the bottom edge of a groove to the necessary extent. Treat the cut surface with the epoxy coating repair kit (Hawle Nr. 5293). Set white clamping ring with chamfer facing downwards in the groove. Pull rubber cuff over the spigot end. Mount hydrant and connect flange, including insulating sleeves.

	DN1 (mm)	DN2 (mm)	Outlet lateral left	Outlet lateral right	H1 (mm)	H2 (mm)	L (mm)	K	T (mm)	weight (kg)	NPK No. 411	NPK No. 412
N840100100	100	100			105	695	235	430	120	32.000	856361	853121
N840100125	100	125			105	695	241	430	125	34.000	856362	853122
N840100001	100	100	2"		105	695	235	430	120	32.000		
N840100002	100	100		2"	105	695	235	430	120	32.000		
N840125001	100	125	2"		105	695	241	430	125	34.000		
N840125002	100	125		2"	105	695	241	430	125	34.000		