


Slide clamp ROBUSTO DN 50 PE d 63 mm, lateral, PN 16

2727

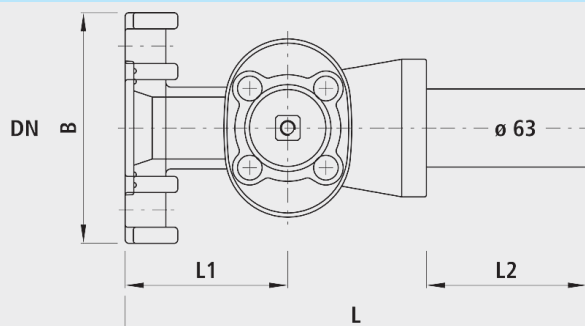

Application

- Assembly with two retaining brackets
- For cast, FZM, steel and Eternit pipes, DN 100 till DN 500

Outlet

- PE weld-on end SDR 11, d 63
- PE weld-on end, factory fitted
- Diameter d 63 suitable for Hawle plug-in fittings
- Schraubmuffen DN 50

Characteristics

- E3 Slider technology
- Slider size DN 50
- Operating temperature - max. 40 °C
- Pressure PN 16

Material

- Gehäuse
 - Späroguss EN-GJS-400 (GGG 40)
 - EWS-Beschichtung nach GSK, RAL-GZ 662, Schichtdicke min. 250 µm

		DN	PN (bar)	L (mm)	L1 (mm)	L2 (mm)	B (mm)	Drill-ø max. (mm)	weight (kg)	NPK No. 411	NPK No. 412
2727050063	1	100-500	16	375	130	125	185	46	14.000	862412	841124

1 = Dichtung 3170 verwenden