


Adapter steel/PE with pull-over sleeve, PN 5

3104

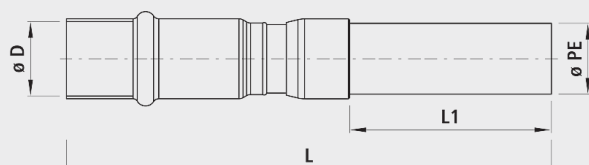

Characteristics

- High quality steel-PE pipe transition for gas piping
- Protection against corrosion through PE casing
- Multiple PE-HD welding possible
- Fully encapsulated steel/PE connection
- Welding with a fillet weld after installation
- SVGW and DVGW certified
- Druckstufe PN 5

Material

- Stahl nach Norm DIN EN 10305 / 1, DIN EN 10305 / 2, DIN EN 10216 / 2, DIN EN 10216-1, DIN EN 10217-1 und DIN EN 10305-4 oder gleichwertig.
- Die Rollringe sind aus Moosgummi (EPDM) DIN 4060 gefertigt.
- Einschweisstützen
 - Standard: PE 100, SDR 11
 - Auf Anfrage: auf SDR 17 ausgedreht

Caution

- PE-pipe 100, SDR 11 standard
- The PE pipe can be turned to SDR 17 on request.
- Other sizes of the PE or steel connections are possible on request.
- The sealing ring must be destroyed with heat after the welding to check the seal.

	DN	ø PE	ø D	L (mm)	L1 (mm)	weight (kg)
3104025032	25	32	33.7	485	300	1.500
3104032040	32	40	42.4	490	300	1.700
3104040050	40	50	48.3	500	300	2.200
3104050063	50	63	60.3	520	300	2.500
3104080090	80	90	88.9	610	255	6.500
3104100110	100	110	114.3	610	250	8.100
3104100125	100	125	114.3	625	255	9.700
3104150160	150	160	168.3	645	240	17.200
3104150180	150	180	168.3	670	240	16.500
3104200225	200	225	219.1	790	300	30.500