
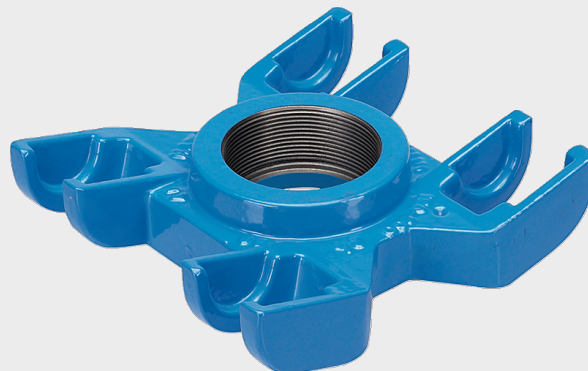



Universal tapping clamp with female thread and twin strap, PN 16

3522



Application

- For cast, FZM, steel and Eternit pipes, DN 150 – DN 500.

Caution

- Specify pipe NP with order.

Characteristics

- Betriebstemperatur
- max. 40°C
- Pressure level PN 16

Material

- Gehäuse
 - Späroguss EN-GJS-400 (GGG 40)
 - EWS-Beschichtung nach GSK, RAL-GZ 662, Schichtdicke min. 250 µm

		DN (mm)	IG	PN (bar)	D (mm)	L (mm)	B (mm)	H (mm)	Drill-ø max. (mm)	weight (kg)
3522075000	1	150-500	2 1/2"	16	62	200	185	50	62	4.200
3522090000	1	150-500	3"	16	62	200	185	50	62	4.150

1 = Dichtung 3170 verwenden