
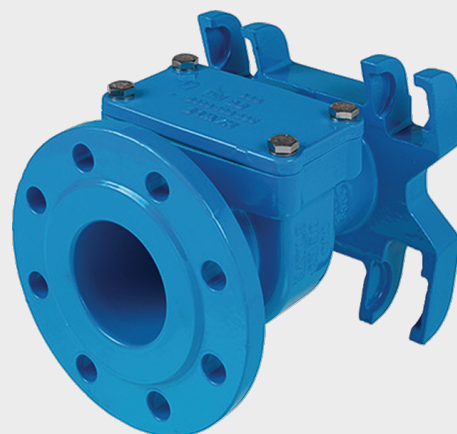


Universal tapping lock clamp with flange outlet, PN 16

3680

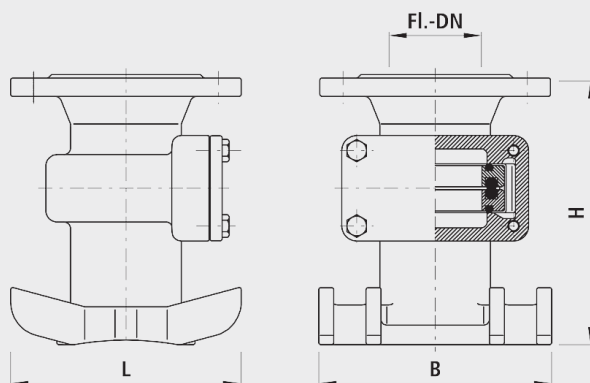

Application

- For cast, FZM, steel and Eternit pipes, DN 150 – DN 500.
- For tapping under pressure, with integrated plug sheet

Characteristics

- Betriebstemperatur - max. 40°C
- Pressure level PN 16

Material

- Gehäuse
 - Späorguss EN-GJS-400 (GGG 40)
 - EWS-Beschichtung nach GSK, RAL-GZ 662, Schichtdicke min. 250 µm

Caution

- Specify pipe NP with order.

		DN (mm)	Flange- DN (mm)	PN (bar)	L (mm)	B (mm)	H (mm)	Drill-ø max. (mm)	weight (kg)	NPK No. 411
3680080000	1	150-500	80	16	200	185	245	75	14.000	865312

1 = Dichtung 3170 verwenden