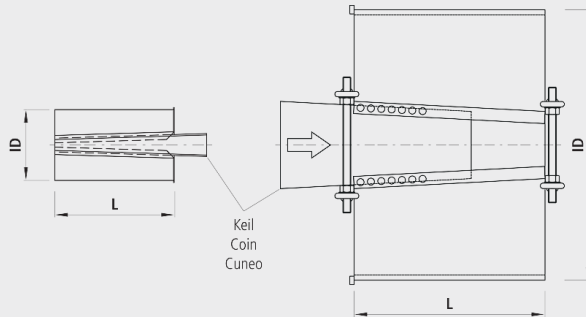


Support sleeve INOX/Steel two-piece, SDR 11

4535

**Material**

- $\varnothing$ d 50 till 355 mm made from INOX
- $\varnothing$ d 355 till 710 mm made from coating steel

Installation and assembly

- The wedge of the supporting sleeve must slide in at least 50 % of the way.
- Cut off projecting end.
- Disassemble the mounting aid after fixing the wedge
- The PE pipe must not be widened as a result of the impact when inserting.

Caution

- A support sleeve is always recommended for PE pipes with a small wall thickness (WS) as well as with vacuum lines (negative pressure).
- Support sleeves for plastic pipes in pressure stage SDR 7.4 or 26 are available on request

	ø D	W	ID (mm)	PN (bar)	L (mm)	weight (kg)	NPK No. 411	NPK No. 412
4535050000	50	4.6	40,8	16	111	0.100	472814	467253
4535063000	63	5.8	51,4	16	173	0.200	472815	467254
4535075000	75	6.8	61,4	16	173	0.200	472816	467255
4535090000	90	8.2	73,6	16	173	0.300	472817	467256
4535110000	110	10.0	90,0	16	173	0.400	472818	467257
4535125000	125	11.4	102,2	16	173	0.500	472819	467258
4535140000	140	12.7	114,6	16	173	0.600	472821	467261
4535160000	160	14.6	130,8	16	198	0.800	472822	467262
4535180000	180	16.4	147,2	16	198	1.000	472823	467263
4535200000	200	18.2	163,6	16	198	1.300	472824	467264
4535225000	225	20.5	184,0	16	223	1.600	472825	467265
4535250000	250	22.7	204,6	16	223	1.800	472826	467266
4535280000	280	25.4	229,2	16	223	1.800	472827	467267
4535315000	315	28.6	257,8	16	223	2.100	472828	467268
4535355000	355	32.3	290,4	16	223	2.900		
4535355001	355	32.2	290.4	16	350	17.000		
4535400001	400	36.3	327.4	16	350	19.000		
4535450001	450	40.9	368.2	16	350	22.000		
4535500001	500	45.4	409.2	16	350	24.000		
4535560001	560	50.8	458.4	16	350	36.000		
4535630001	630	57.2	515.6	16	350	41.000		
4535710001	710	64.5	581.0	16	350	45.000		

L = Mounted length