


AUMA actuator electric, 230 V / AC

4991

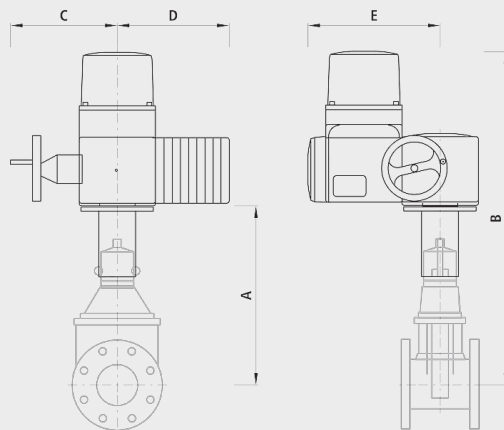

Application

- The AUMA actuator can be mounted onto all Hawle E2/3 sliders from DN 50.
- Possible to retrofit
- Delivery incl. adapter (lantern)

Characteristics

- Rotary drive type SA for control operation OPEN/CLOSED 230 VAC 1-phase AC current
- Protection class IP 68 (standard)
- With 2 torque and 2 limit switches
- Optical position indicator
- Handwheel for manual override
- Heating integrated in the motor from 5 to 20 W,max. 0.1 Amp.
- Closing times in seconds per stroke according to the table (t/s)

Caution

- Spezielles Oberteil mit beschichteter Spindel für Motorenantriebe im regelmässigen Gebrauch ab DN 150 erhältlich

	DN	PN (bar)	Type	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	T/S	weight (kg)
4991V00051	50	10/16/25	SA07.6	319	610	249	565	238	37	29.000
4991V00066	65	10/16/25	SA07.6	382	673	249	565	238	48	29.000
4991V00081	80	10/16/25	SA07.6	389	680	249	565	238	60	29.000
4991V00101	100	10/16/25	SA07.6	426	717	249	565	238	75	29.000
4991V00126	125	10/16/25	SA10.2	498	791	254	571	248	93	35.000
4991V00151	150	10/16/25	SA10.2	510	803	254	571	248	112	35.000
4991V00201	200	10/16/25	SA10.2	617	910	254	571	248	127	35.000
4991V00251	250	10/16/25	SA14.2	821	1009	338	622	286	157	69.000
4991V00301	300	10/16/25	SA14.2	928	1093	338	622	286	136	69.000
4991V00351	350	10/16/25	SA14.2	1038	1178	338	622	286	160	69.000
4991V00401	400	10/16/25	SA14.2	1147	1336	338	622	286	155	71.000