


## AUMA actuator electric, 24 VCC

4992

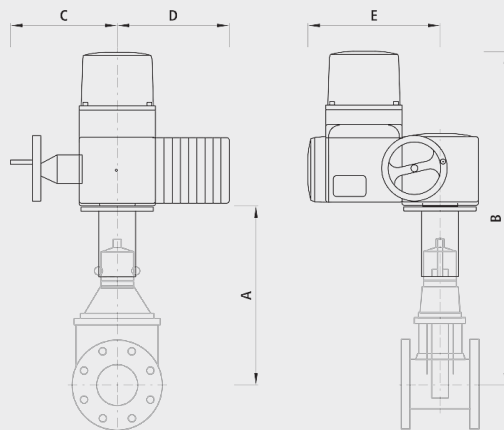

### Application

- The AUMA actuator can be mounted onto all Hawle E2/3 sliders from DN 50.
- Possible to retrofit
- Delivery incl. adapter (lantern)

### Characteristics

- Protection class IP 68 (motor protection) IP 65 (standard)
- Rotary drive type SA for control operation OPEN/CLOSED 24 VDC, 1-phase DC current
- With 2 torque and 2 limit switches
- Optical position indicator
- Handwheel for manual override
- Heating integrated in the motor from 5 to 20 W, max. 0.8 Amp.
- Closing times in seconds per stroke according to the table (t/s)

### Caution

- Spezielles Oberteil mit beschichteter Spindel für Motorenantriebe im regelmässigen Gebrauch ab DN 150 erhältlich

|            | DN  | PN (bar) | Type   | A (mm) | B (mm) | C (mm) | D (mm) | E (mm) | T/S | weight (kg) |
|------------|-----|----------|--------|--------|--------|--------|--------|--------|-----|-------------|
| 4992V00051 | 50  | 10/16/25 | SA07.6 | 319    | 610    | 249    | 443    | 238    | 37  | 34.000      |
| 4992V00066 | 65  | 10/16/25 | SA07.6 | 382    | 673    | 249    | 443    | 238    | 48  | 34.000      |
| 4992V00081 | 80  | 10/16/25 | SA07.6 | 389    | 680    | 249    | 443    | 238    | 60  | 34.000      |
| 4992V00101 | 100 | 10/16/25 | SA07.6 | 426    | 717    | 249    | 443    | 238    | 75  | 34.000      |
| 4992V00126 | 125 | 10/16/25 | SA10.2 | 498    | 791    | 254    | 528    | 248    | 93  | 40.000      |
| 4992V00151 | 150 | 10/16/25 | SA10.2 | 510    | 803    | 254    | 528    | 248    | 112 | 40.000      |
| 4992V00201 | 200 | 10/16/25 | SA10.2 | 617    | 910    | 254    | 528    | 248    | 127 | 40.000      |
| 4992V00251 | 250 | 10/16/25 | SA14.2 | 821    | 1009   | 338    | 520    | 286    | 157 | 76.000      |
| 4992V00301 | 300 | 10/16/25 | SA14.2 | 928    | 1093   | 338    | 520    | 286    | 136 | 76.000      |
| 4992V00351 | 350 | 10/16/25 | SA14.2 | 1038   | 1178   | 338    | 520    | 286    | 160 | 76.000      |
| 4992V00401 | 400 | 10/16/25 | SA14.2 | 1147   | 1336   | 338    | 520    | 286    | 155 | 78.000      |