


Wall duct flange-PE for installation in the wall, PN 16

6852

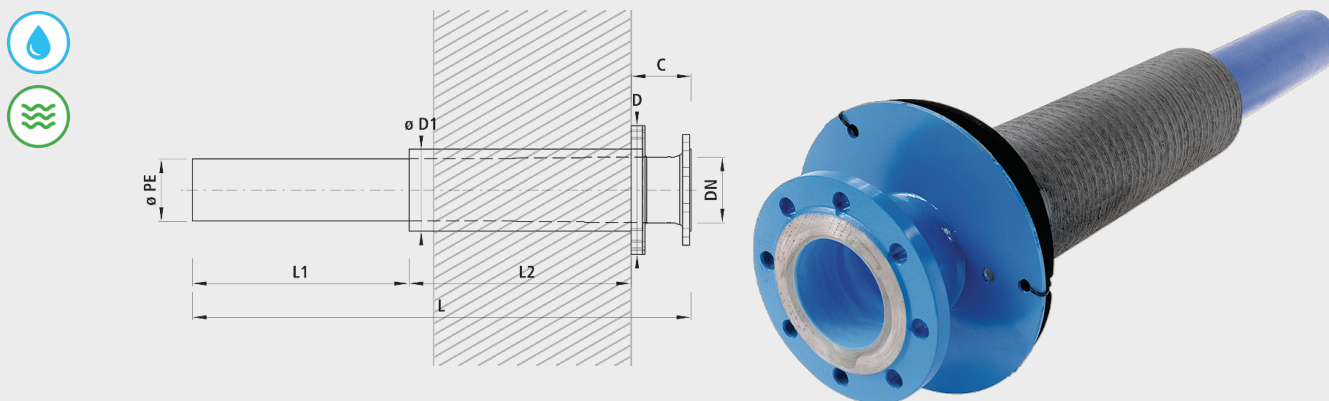

Characteristics

- Fully encapsulated steel/PE connection
- Flange connection according to EN 1092-2 (DIN 28605)
- Fixed point fixing available
- Flange: Drill PN 16

Material

- Weld-in end: PE 100, SDR 11
- Protection pipe: scratched PVC

Installation and assembly

- For direct installation in the wall

	Ø PE	DN	PN (bar)	L (mm)	L1 (mm)	L2 (mm)	D (mm)	Ø D1 (mm)	C cm	Ø KB N (mm)	weight (kg)	NPK No. 411	NPK No. 412
6852075065	75	65	16	960	255	600	300 Ø	110	10	150	14.000	884216	711315
6852090080	90	80	16	960	255	600	300 Ø	125	11	150	15.000	884217	711326
6852110100	110	100	16	960	255	600	300 Ø	160	11	200	18.000	884218	711337
6852125100	125	100	16	960	255	600	300 Ø	160	11	200	21.000	884219	711338
6852160125	160	125	16	1120	400	600	330 Ø	210	12	250	33.000	884219	711342
6852160150	160	150	16	1120	400	600	330 Ø	210	12	250	36.000	884219	711352
6852180150	180	150	16	1120	400	600	330 Ø	210	12	250	36.000	884219	711353
6852225200	225	200	10	1180	400	600	330 Ø	270	18	300	60.000	884219	711365
6852225201	225	200	16	1180	400	600	330 Ø	270	18	300	60.000	884219	711375