
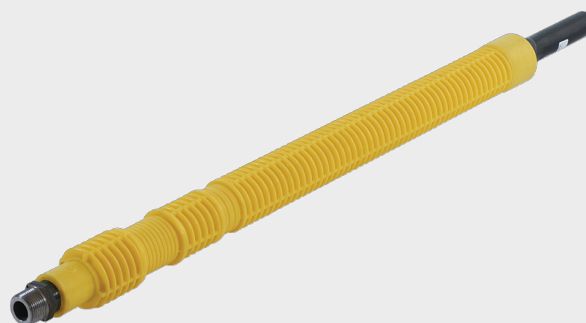


## Wall duct PE-AG, with male thread, straight, PN 5

6855

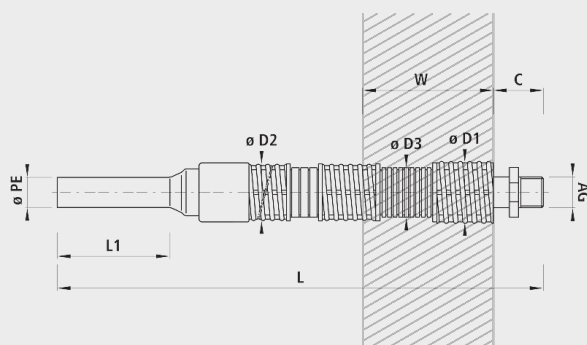

### Characteristics

- Compatible with multi-range inlets
- SGVW certified

### Material

- Fully encapsulated steel/PE connection
- Connection of male thread: Steel
- Weld-in end: PE 100, SDR 11
- Protective casing: PE with fixed-point fixation

### Installation and assembly

- For direct installation in the wall, with or without grouting device
- Dry installation in core drill hole
- Compatible with multi-range inlets
- The pull-out protection can be mounted directly.

### Caution

- Observe the installation instructions

|            | ø PE | AG  | L<br>(mm) | L1<br>(mm) | ø D1<br>(mm) | ø D2<br>(mm) | ø D3 | C cm  | ø KB T<br>(mm) | ø KB N<br>(mm) | W T | W N<br>(mm) | weight<br>(kg) |
|------------|------|-----|-----------|------------|--------------|--------------|------|-------|----------------|----------------|-----|-------------|----------------|
| 6855032070 | 32   | 1"  | 700       | 120        | 66           | 60           | 53   | 10-14 | 100            | 90             | 370 | 300         | 2.100          |
| 6855040070 | 40   | 1¼" | 740       | 120        | 80           | 75           | 75   | 11-15 | 130            | 120            | 370 | 300         | 3.300          |
| 6855050070 | 50   | 1½" | 740       | 130        | 80           | 75           | 75   | 11-15 | 130            | 120            | 370 | 300         | 3.300          |
| 6855063070 | 63   | 2"  | 740       | 130        | 95           | 90           | 90   | 12-16 | 130            | 120            | 370 | 300         | 5.400          |
| 6855032110 | 32   | 1"  | 1000      | 120        | 66           | 60           | 53   | 10-14 | 100            | 90             | 670 | 600         | 3.500          |
| 6855040110 | 40   | 1¼" | 1040      | 120        | 80           | 75           | 75   | 11-15 | 130            | 120            | 670 | 600         | 5.000          |
| 6855050110 | 50   | 1½" | 1040      | 130        | 80           | 75           | 75   | 11-15 | 130            | 120            | 670 | 600         | 5.000          |
| 6855063110 | 63   | 2"  | 1040      | 130        | 95           | 90           | 90   | 12-16 | 130            | 120            | 670 | 600         | 8.600          |