


Pull-over sleeve, PN 100

6902

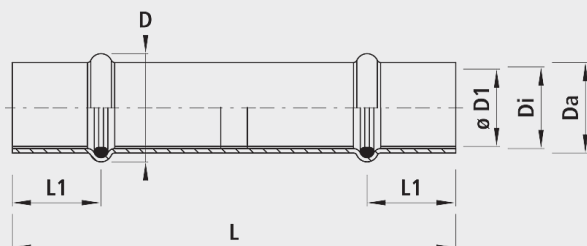

Characteristics

- Screw-less, self-sealing connection element for steel pipes
- The sealing chamber is designed so that it seals automatically, even with low internal pressures in the pipe system.
- To be pushed over on both sides for the same pipe connection dimensions
- Temperature range -10°C to +50°C

Installation and assembly

- Pushing over the steel pipes
- Weld both ends with a fillet weld
- Destroy O-rings using a welding torch to check the seal

Material

- Stahl nach Norm DIN EN 10305 / 1, DIN EN 10305 / 2, DIN EN 10216 / 2, DIN EN 10216-1, DIN EN 10217-1 und DIN EN 10305-4 oder gleichwertig.
- Die Rollringe sind aus Moosgummi (EPDM) DIN 4060 gefertigt.

	DN	PN (bar)	ø D1 (mm)	Di	Da	D (mm)	L (mm)	L1 (mm)	weight (kg)
6902080088	80	100	88.9	92.0	103	114.0	300	95	10.000
6902100108	100	100	108.0	111.0	124	134.0	300	95	11.000
6902100114	100	100	114.3	117.0	128	137.0	300	95	12.000
6902150159	150	100	159.0	162.5	178	187.4	300	95	18.000
6902150168	150	100	168.3	172.0	186	202.0	300	95	20.000
6902200219	200	100	219.1	222.5	241	250.0	400	95	32.000
6902250273	250	100	273.0	278.0	302	306.0	400	100	52.000
6902300323	300	100	323.9	329.0	354	357.5	400	100	60.000