


Pull-over sleeve unilateral SMU-S, PN 16

6908

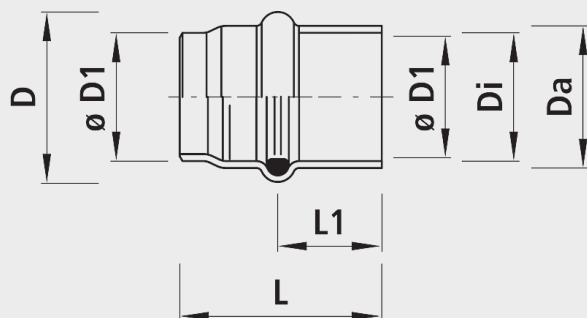

Characteristics

- Screw-less, self-sealing connection element for steel pipes
- The sealing chamber is designed so that it seals automatically, even with low internal pressures in the pipe system.
- To push over on one side, weld-on on the other side with a V-seam
- Temperature range -10°C to +50°C

Installation and assembly

- Weld onto the steel pipe with a V-seam
- Pushing on the other steel pipe
- Weld push-over end with a fillet weld
- Destroy O-rings using a welding torch to check the seal

Material

- Stahl nach Norm DIN EN 10305 / 1, DIN EN 10305 / 2, DIN EN 10216 / 2, DIN EN 10216-1, DIN EN 10217-1 und DIN EN 10305-4 oder gleichwertig.
- Die Rollringe sind aus Moosgummi (EPDM) DIN 4060 gefertigt.

	DN	PN (bar)	ø D1 (mm)	Di	Da	D (mm)	L (mm)	L1 (mm)	weight (kg)
6908080088	80	16	88.9	91.6	101.6	120.0	250	100	3.200
6908100108	100	16	108.0	111.0	121.0	138.5	250	100	3.700
6908100114	100	16	114.3	117.0	127.0	145.0	250	100	4.000
6908125133	125	16	133.0	136.0	145.0	169.0	250	100	4.300
6908125139	125	16	139.7	143.4	152.4	169.0	250	100	4.300
6908150159	150	16	159.0	162.5	172.5	198.0	250	100	5.300
6908150168	150	16	168.3	172.5	182.5	207.0	250	100	5.700
6908200219	200	16	219.1	222.5	233.5	258.0	250	100	8.000
6908250273	250	16	273.0	278.5	289.5	316.0	250	100	9.800
6908300318	300	16	318.0	323.0	336.0	369.0	250	100	13.500
6908300323	300	16	323.9	329.1	342.1	369.0	250	100	13.500
6908400406	400	16	406.4	411.0	423.6	406.4	250	100	16.500