


Insulating piece with thread, PN 5

6911

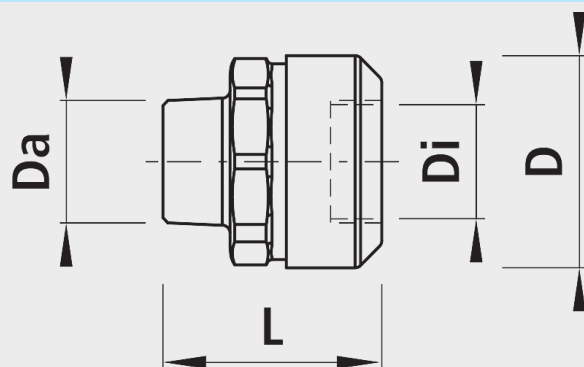

Product information

- Ceramic isili cut off point
- Nominal width DN 25 up to DN 50
- With female and male thread

Characteristics

- First side male thread, second side female thread
- Temperature range -20°C to +60°C
- Electrical breakdown test with 2000 V
- Can be used for other media up to PN16
- Not permitted for water
- Thermally loadable to 650°C
- SVGW-certificate 98-151-5

Material

- Casing: steel S355J2G4
- Selection shaft: brass (till DN 50)
- Dichtung: Perbunan (DIN 3535 T1 /DIN EN 549)
- Lackierung: «Gasgelb» RAL 1021

	IG	Di	Da	D (mm)	L (mm)	weight (kg)
6911032000	1"	33.7	33.7	60	78	0.660
6911040000	1¼"	42.4	42.4	81	85	1.280
6911050000	1½"	48.3	48.3	81	85	1.320
6911063000	2"	60.3	60.3	93	92	1.900