
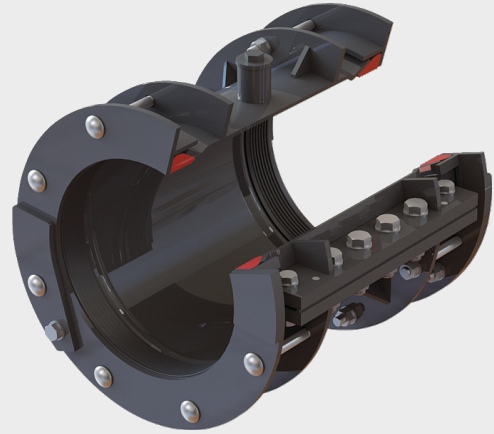


Coupling two-piece HAWLE-DUOFIT straight

7289

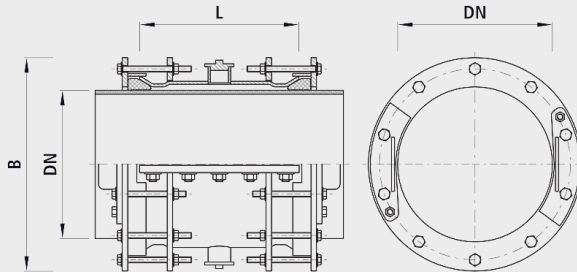

Application

- Two-part multi-range coupling straight for repairing fibre cement, cast and plastic pipes.
- The coupling can also be used for drilling pipes under pressure.

Characteristics

- The separate sealing packs for the specific pipe make it possible to centre the coupling exactly.
- The cone-shaped sealing collar on the pipe allows for a pipe tolerance of up to 30 mm.
- The sealing collar is made from EPDM rubber.
- The outlets at the top and bottom facilitate an assembly without pressure, as well as additional connection options.
- Flanschen-Anschlussmasse
- nach EN 1092-2
- Betriebstemperatur
- max. 40°C
- Der Korrosionsschutz dieser Mehrbereichskupplung ist mit der bewährten Rilsan®-Beschichtungstechnik.

Material

- Gehäuse und Spannring
- Stahl mit Rilsan® Beschichtung
- Dichtung
- Standard EPDM nach W 270, NBR auf Anfrage
- Zugsicherungselemente
- Gehärteter Stahl mit Dacromet®-Beschichtung (Dauergeschmierte Schrauben)
- Schrauben
- Stahl mit Dacromet®-Beschichtung (Dauergeschmiert)
- Druckstufe PN 16
- Andere Druckstufen auf Anfrage möglich

Caution

- Other nominal widths on request

	DN	ø D min./max.	PN (bar)	L (mm)	B (mm)	weight (kg)
7289300335						
7289350355						
7289350375						
7289400405						
7289400425						
7289450450						
7289450475						
7289500505						
7289500525						
7289500550						
7289500575						
7289600605						
7289600635						
7289600660						
7289700685						
7289700710						
7289700735						
7289700765						
7289800795						
7289800850						
7289800875						
7289900910						
7289900940						
7289900970						
7289101000						
7289101015						
7289101045						
7289101075						
7289111095						
7289111115						
7289111145						
7289111175						
7289121200						
7289121220						
7289121250						