
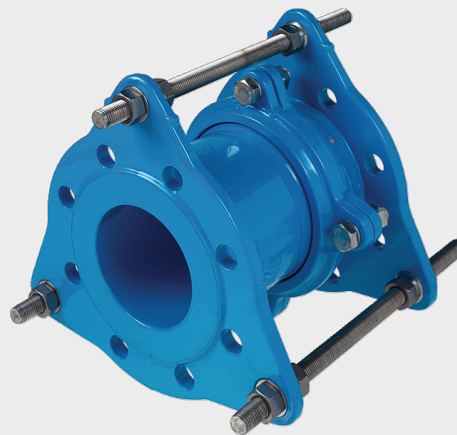


Hawle-Vario long, 0° till 10°, PN 16

8011

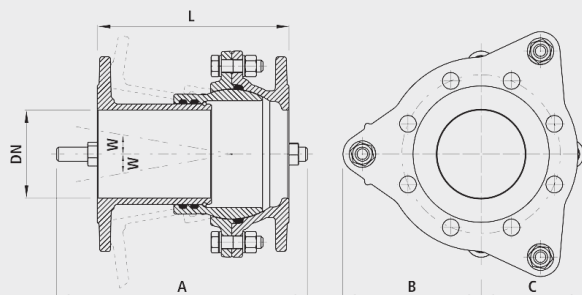

Application

- To compensate for the differences in length, twisted or angled flanges up to 10°
- Can be used as a mounting and dismounting adapter

Characteristics

- Can be delivered in a shorter version of (No. 8010) or a longer version of (Nr. 8011)

Material

- O-Ring seals: EPDM
- Housing
 - Spheroidal graphite cast iron EN-GJS-400 (GGG 40)
 - EWS coating according to GSK, RAL-GZ 662, coating thickness min. 250 µm

Thrust protection

- The HAWLE/VARIO can be secured in the installed position with a shearing protection set consisting of threaded rods (spherical washers, ball sockets and nuts made from INOX A2).

	DN	PN (bar)	L (mm)	A (mm)	B (mm)	C (mm)	weight (kg)
8011V00050	50	16	207-323	415	130	87	10.200
8011V00080	80	16	214-344	415	147	107	15.200
8011V00100	100	16	216-350	415	157	117	17.300
8011V00150	150	16	250-408	480	190	190	29.300
8011V00200	200	10	280-462	530	229	229	47.300
8011V00201	200	16	280-462	530	229	229	47.300