


Installation kit rigid for house connection slider

9100

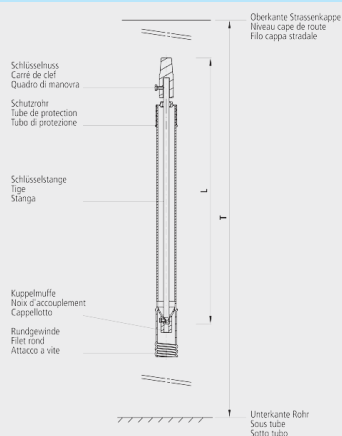

Application

- For all House-connection slider $\frac{3}{4}$ "-2", DN 20 to DN 40.

Characteristics

- Special lengths on request

Material

- Einbaugarnituren
 - Schutzrohr aus PE
 - Schloßelnuß Sphäroguss EN-GJS-400 (GGG 40), verzinkt
 - Kuppelmuffe Sphäroguss EN-GJS-400 (GGG 40), verzinkt
 - Schlüsselstangen Stahl verzinkt

	DN	L (mm)	D (mm)	weight (kg)	NPK No. 411	NPK No. 412
9100000000	$\frac{3}{4}$ "-2"	1250	1700	3.300	87133*	871155