


Aeration/ventilation valve 1"

9870

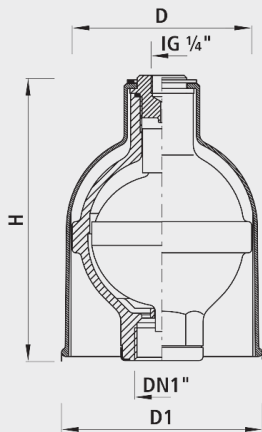

Mode of operation

- The automatic single-stage operational air vent makes sure that small pockets of air are blown out during the operation of the pipework. This means that the air is blown out when the pressure is elevated and sucked in when there is a vacuum.

Material

- Casing and float: POM
- Rotating fitting and lock screw: Brass
- Valve seal: EPDM
- UV-protective cap: PE

Performance data

- Opening cross-section: 1.77 mm²
- Ventilation capacity: 7.8 m³/h
- Aeration capacity: 9 m³/h

Medium

- Drinking water

Medium temperature

- max. 30 °C

Test pressure

- Housing: 24 bar

| | Operating range (bar) | D (mm) | D1 (mm) | H (mm) | weight (kg) | NPK No. 411 | NPK No. 412 | BIM / CAD |
|------------|-----------------------|--------|---------|--------|-------------|-------------|-------------|-----------|
| 9870032006 | 0.1-6 bar | 108 | 122 | 172 | 0.900 | 833413 | 832111 | |
| 9870032016 | 0.8-16 bar | 108 | 122 | 172 | 0.900 | 833413 | 832111 | |