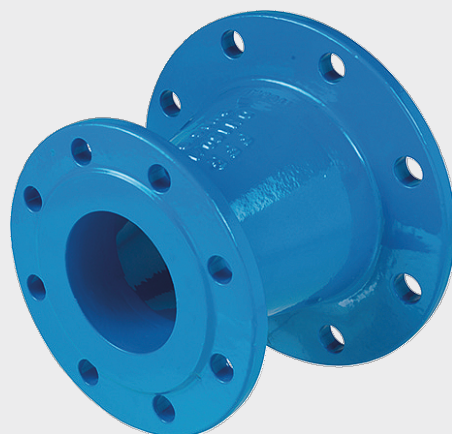
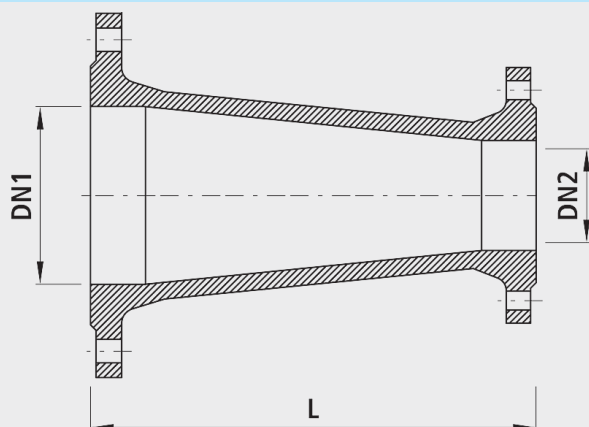


Réduction à brides, PN 16**8550****Matière**

- Corps
 - Fonte sphéroïdale EN-GJS-400 (GGG 40),
 - Revêtement EWS selon GSK, RAL-GZ 662, épaisseur de couche min. 250 µm

Attention

- Longeurs spéciales jusqu'à 2000 mm et formes spéciales selon dessin en ac. 37, avec revêtement EWS, sur demande

	DN1 (mm)	DN2 (mm)	PN (bar)	L (mm)	Poids (kg)	N° CAN 411	N° CAN 412	BIM / CAD
8550065050	65	50	16	200	7.100	248157		
8550080050	80	50	16	200	7.500	248158	247121	
8550080065	80	65	16	200	8.700	248178		
8550100050	100	50	16	200	8.700	248159	247122	
8550100065	100	65	16	200	9.100	248179		
8550100080	100	80	16	200	11.100	248219	247132	
8550125065	125	65	16	200	11.200	248181		
8550125080	125	80	16	200	10.700	248221	247133	
8550125100	125	100	16	200	11.400	248241	247143	
8550150080	150	80	16	200	13.300	248222	247134	
8550150100	150	100	16	200	13.500	248242	247144	
8550150125	150	125	16	200	14.700	248262	247154	
8550200080	200	80	10	300	18.000	248223	247215	
8550200100	200	100	10	300	21.900	244243	247225	
8550200125	200	125	10	300	22.100	244263	247235	
8550200150	200	150	10	300	22.300	244283	247245	
8550201080	200	80	16	300	18.000	248223	247315	
8550201100	200	100	16	300	21.400	248243	247325	
8550201125	200	125	16	300	21.800	248263	247335	
8550201150	200	150	16	300	22.500	248283	247345	
8550250100	250	100	10	300	22.000	244244	247226	
8550250125	250	125	10	300	31.600	244264	247236	
8550250150	250	150	10	300	30.500	244284	247246	
8550250200	250	200	10	300	35.200	244324	247256	
8550251100	250	100	16	300	29.200	248244	247326	
8550251125	250	125	16	300	29.600	248264	247336	
8550251151	250	150	16	300	29.000	248284	247346	
8550251201	250	200	16	300	34.400	248324	247356	
8550300150	300	150	10	300	35.200	244285	247247	
8550300200	300	200	10	300	41.000	244325	247257	
8550300250	300	250	10	300	41.000	244345	247267	
8550301150	300	150	16	300	37.000	248285	247347	
8550301201	300	200	16	300	35.500	248325	247357	
8550301251	300	250	16	300	41.000	248345	247367	
8550400300	400	300	10	300	41.000	244367	247278	
8550401301	400	300	16	300	41.000	248367	247378	